

The VideoFlyer 150 is a self-contained digital video viewing monitor for looping video display with a touchscreen video option. The unit comprises of 15" TFT LCD panel with built-in speakers. Video is stored and played back from a plug-in and play Compact Flash memory card.



## FEATURES :

### Enclosure :

Robust lightweight aluminium enclosure available in a range of colours: Silver grey, Black.

### Storage Medium :

CompactFlash memory card - All sizes, for example: 64MB/128MB/256MB/512MB/1GB

### Audio Output :

Built-in stereo speakers (Left/Right)

### Playback Modes :

#### **Loop mode :**

Videos can be set to play in a continuous loop either individually or in sequence.

#### **Auto mode :**

Videos can be set to sleep mode or auto playback at power up.

### **Program mode:**

All tracks and scheduled functions can be programmed by DV Studio Advanced software which writes the MPEG video files on to the CompactFlash card.

### **Standard Playback :**


Standard player modes - play, stop, pause, repeat, previous track, next track, volume control, mute. Specific track or playlist select.

JPEG

MP3

MPEG-2

MPEG-1

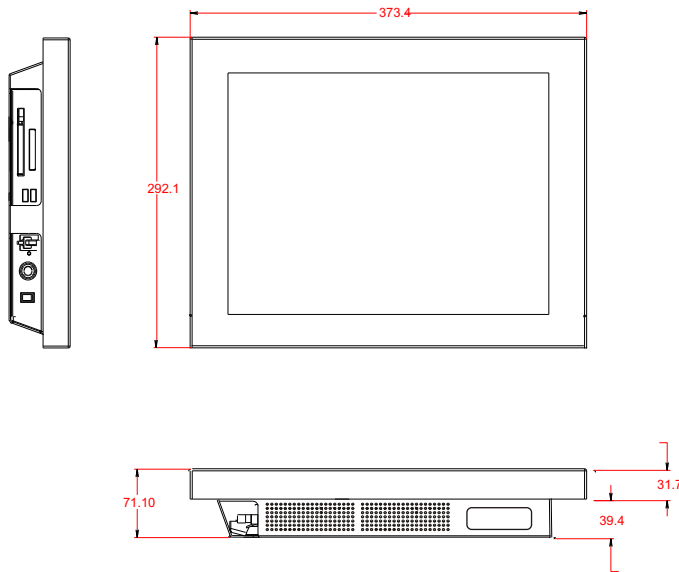

# SPECIFICATION

### Playable Format

MPEG-1 video (Video-CD), MPEG-2 video (DVD)  
MPEG still picture, MP3 audio, JPEG picture

### Storage

CompactFlash card : Type 1/2

### Panel Information

Screen size : 15" (Diagonal)  
Active area : 304(H) x 228(V)  
Max. Resolution : 1024(H) x 768(V)  
Brightness : 250 cd/m<sup>2</sup>  
Contrast ratio : 400 : 1  
Viewing angle : 120°(H) 100°(V)

### Video Resolution

Low resolution : 352 x 288 pixels (PAL)  
: 352 x 240 pixels (NTSC)  
High resolution : 720 x 576 pixels (PAL)  
: 720 x 480 pixels (NTSC)  
Still picture : 704 x 576 pixels (PAL)  
: 704 x 480 pixels (NTSC)

### Audio Output

Internal speakers (2W), Stereo headphone jack

### Playback Functions

Standard playback : Play, Stop, Pause, Repeat, Previous, Next Track, Volume  
Programmable playback : Loop, Auto and Program mode

### Options

1. Touch Screen (8 segmented touch or analog touch)
2. Wireless (PCMCIA, GPRS)\*
3. Barcode scanner (RS-232 port)
4. USB

\*Only for network version (Remote Flyer)

### Power

Power input : 12V DC, 2A typical  
Power consumption : 24W

### Environmental

Operating temperature : 0°C to 50°C  
Relative humidity : 5%-95% relative humidity, (Non-condensing)

### Dimension

Dimension (W x D x H) : 373.4mm x 71.15mm x 292.1mm

### Weight

Weight (net) : 4kg

### Ordering Information

Part No.	Model	Description
5868915-10	VF-150-T	VF-150 with 8-segment Touch
5869422-10	VF-150-BC	VF-150 with Barcode Scanner
5869432-10	VF-150-TBC	VF-104 with 8-segment Touch & Scanner
5869424-10	VF-150-A	VF-150 with Analog Touch

Enclosure Color : Silver grey

Digital View also offer a range of network enabled digital media players and Video Flyers working with the Internet based Remote Transfer content management system, see <http://www.digitalview.com> for more details.

Brand names belong to their respective owners. Specifications subject to change without notice. July 2005

## ASIA

Digital View Ltd.  
19th floor Tai Tung Building  
8 Fleming Road  
Wanchai, Hong Kong

Tel: (852) 2861 3615  
Fax: (852) 2520 2987  
Email: [sales@digitalview.com](mailto:sales@digitalview.com)

## USA

Digital View Inc.  
18440 Technology Drive  
Building 130  
Morgan Hill, CA 95037  
USA

Tel: (1) 408-782-7773  
Fax: (1) 408-782-7883  
Email: [sales@digitalview.com](mailto:sales@digitalview.com)

## EUROPE

Digital View Ltd.  
36 Mortimer Street  
London, W1W7RG,  
England

Tel: +44 20-7631-2150  
Fax: +44 20-7436-1299  
Email: [sales@digitalview.com](mailto:sales@digitalview.com)

Please visit our web site for more information: [www.digitalview.com](http://www.digitalview.com)

