

# AC-242A • 24 Chars×2 Line 1/16 Duty

## FEATURE :



1. Construction : STN LCD panel, Bezel, Zebra and PCB.
2. Optional LED or EL back-light.
3. Controller : K90066U or Equivalent.
4. 4.5V or 3.3V single power input. Built-in DC/DC converter while using 3.3V power input.
5. Normal/ Extended temperature type.

## ELECTRICAL CHARACTERISTICS :

Item	Sym.	Condition	Typ. Value	Unit.
LCD Driving Voltage	VDD-VO	25°C	5.0	V
Supply Current	IDD	VDD=5.0V	1.2	mA

## INTERFACE :

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

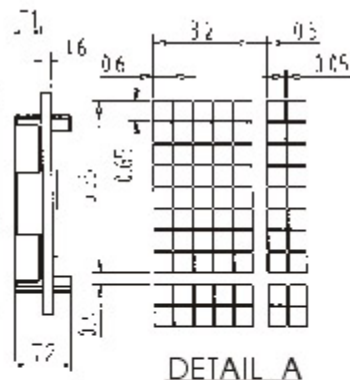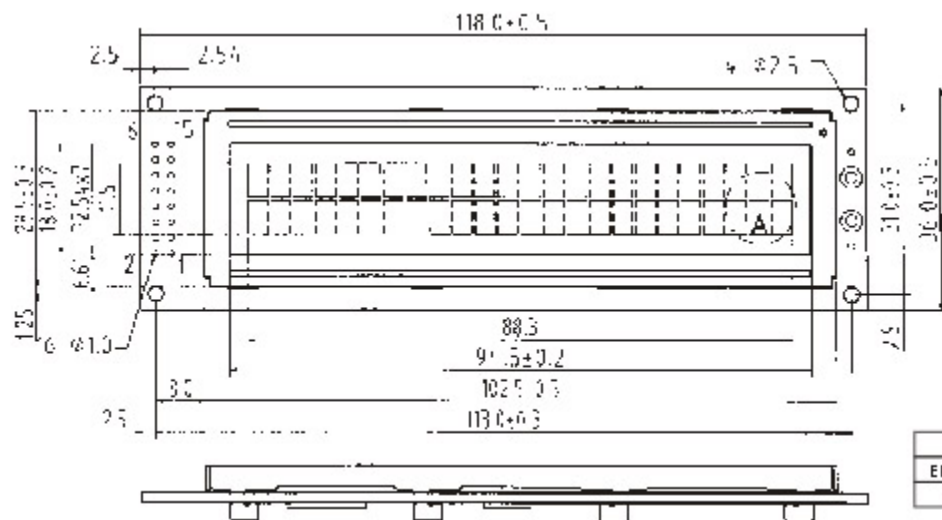

### THICKNESS:

VERSION	T1	T2
EL&I/O BACKLIGHT	4.4±0.3	9.5Max
LED BACKLIGHT	9.6±0.3	14.7Max