Rev 1	10,13'04	First release

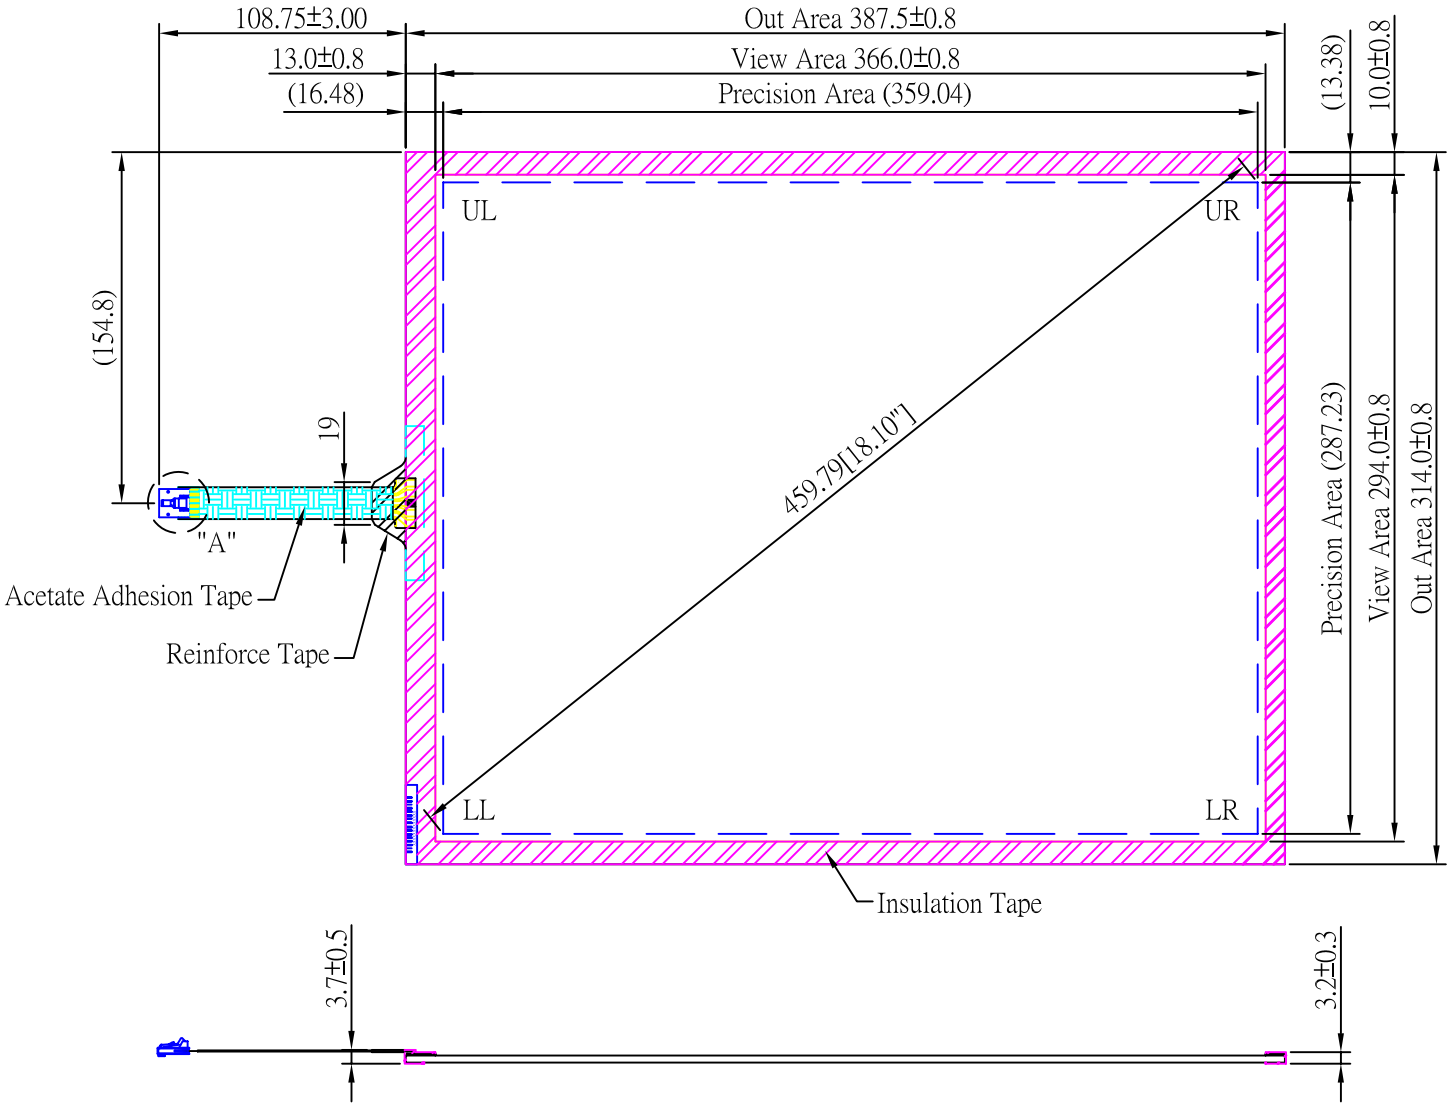



DETAIL A

Pin Out	
1	UR
2	UL
3	SHIELD
4	LL
5	LR

NOTES:

1. GLASS OPTICAL CHARACTERISTIC IS ANTI-GLARE
2. TOPSHEET GLASS THICKNESS 3.0mm
3. FLEXTAIL DO NOT BEND TO LESS THAN 3.175mm RADIUS
4. TAIL ACCEPTS 2.54mm PITCH
5. INSULATION TAPE : POLYESTER TAPE , TOTAL THICKNESS 0.063mm , BLACK
6. REINFORCE TAPE : POLYESTER TAPE , TOTAL THICKNESS 0.1mm , BLACK
7. ACETATE ADHESION TAPE : TOTAL THICKNESS 0.25mm , BLACK
8. 5 PIN AMP CONNECTOR, LATCH STYLE HOUSING P/N:487526-4 OR EQUIVALENT

THIRD ANGLE PROJECTION	Dimensions m/m	eTurboTouch
Drawn by Kawa Huang	Scale FREE	
Checked by	Release Date 10,13'04	Drawing Number SC-181E30P5L4AS1