



DETAIL A

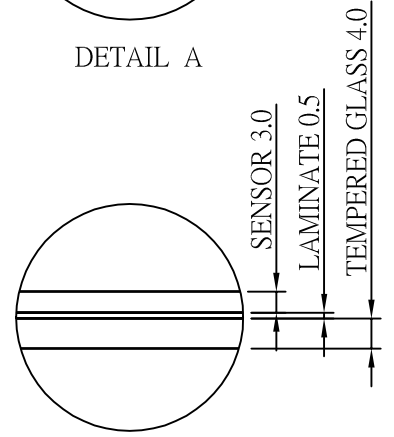


DETAIL B

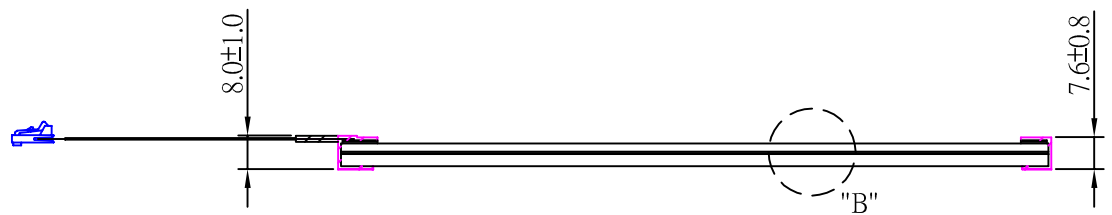

Pin Out	
1	UR
2	UL
3	SHIELD
4	LL
5	LR

- NOTES:
1. GLASS OPTICAL CHARACTERISTIC IS ANTI-GLARE
  2. TOPSHEET GLASS (SENSOR) THICKNESS 3.0mm
  3. FLEXTAIL DO NOT BEND TO LESS THAN 3.175mm RADIUS
  4. TAIL ACCEPTS 2.54mm PITCH
  5. INSULATION TAPE : POLYESTER TAPE , TOTAL THICKNESS 0.063mm , BLACK
  6. REINFORCE TAPE : POLYESTER TAPE , TOTAL THICKNESS 0.1mm , BLACK
  7. ACETATE ADHESION TAPE : TOTAL THICKNESS 0.25mm , BLACK
  8. 5 PIN AMP CONNECTOR, LATCH STYLE HOUSING P/N:487526-4 OR EQUIVALENT

THIRD ANGLE PROJECTION  Dimensions: m/m

Drawn by Kawa Huang Scale FREE

Checked by Release Date 10,13'04



Part Number SS-104E75P5L4AS1